


Load Cell Model FAK-88

Price computing scale sensors

Appearance



Outline

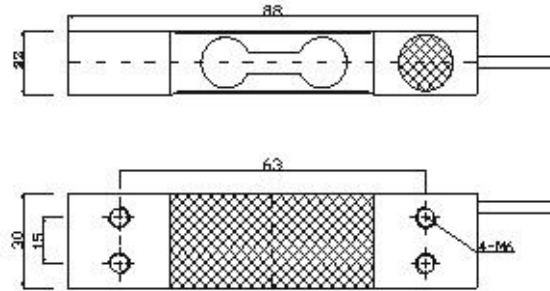

Capacity:
3, 6, 12, 20, 35 Kg

Specifications

Comprehensive Error		0.02	
Output Sensitivity	(mV/V)	2.0 ± 0.05	
Nonlinearity	(%F.S)	± 0.02	
Repeatability	(%F.S)	± 0.01	
Hysteresis	(%F.S)	± 0.02	
Creep	(%F.S/30min)	± 0.02	
Temp. Effect on Zero	(%F.S/10°C)	± 0.02	
Temp. Effect on Output	(%F.S/10°C)	± 0.02	
Zero Output	(%F.S)	± 2	
Input Resistance	(Ω)	410 ± 10	1100 ± 80
Output Resistance	(Ω)	350 ± 5	1000 ± 5
Insulation Resistance	(MΩ)	≥ 5000	
Excitation Voltage	(V)	10 (FAK-88-1)	15 (FAK-88-2)
Operation Temp Range	(°C)	-10—+40	-20—+60
Overload Capacity	(%F.S)	150	
Capacity	(kg)	3,6,12,20,35	
Material		Aluminum alloy	
Protection		IP65	
Recommended Applications		Price computing scale sensor	

Note: All Specifications Subject To Change Without Notice & Custom-made Products Are Available.